




Athletic Flooring

Engineered and Manufactured by the Pawling Corporation



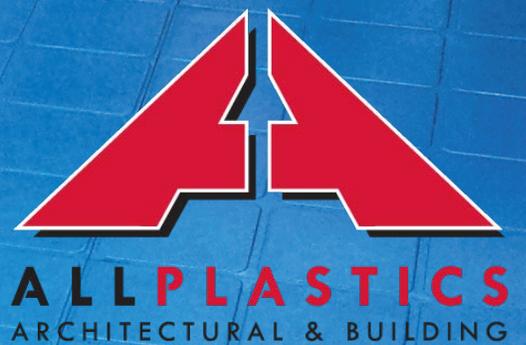

Why Choose Pawling?

With over sixty years of experience, Pawling Corporation is a leading manufacturer of high-quality architectural products that will meet your material specifications as well as your design needs. We offer responsive, results oriented design capabilities to satisfy any custom design requirement.

- Complete line of impact protection, entrance mats, athletic tile and parking products to protect your entire facility in any application
- Broad line of exceptional products to protect facilities front to back, inside and outside
- Custom-designed fabrications and colors based on your needs



Table of Contents

- Product Selection Guide | 3
- Interlok® Tiles | 4
- Recycled Rubber Tiles | 6
- Color Selection Guide | 7

The Pawling Difference

When it comes to athletic flooring, Pawling has been an industry leader for over 40 years. Our unique Interlok® system provides secure, trip-free flooring without the costly installation of glue-down rubber floors. Choose from our traditional reversible tiles or our patented hidden interlocking tiles to create the look and feel you want in a variety of color options. Our Interlok® tiles are manufactured using a proprietary virgin rubber compound unique to the industry. Pawling’s Pro-Tek® athletic flooring compound is formulated to provide the superior performance that recycled rubber flooring cannot match.

- “Closed cell” construction makes cleaning easier
- Superior rebound of virgin rubber enhances durability and life cycle of floor
- 100% virgin rubber tiles feature solid color throughout the full tile - not a thin “surface layer” that will eventually wear through in high traffic areas
- Virgin rubber is virtually odorless and does not give off the unpleasant odor frequently associated with recycled rubber floors

Product Selection Guide

	Material	Free Weights		Fitness Area	Aerobics	Ice Rink	Ski Lodge	Multi-purpose	High foot traffic areas
		Standard	Heavy-Duty						
Flip-It™	Virgin Rubber	●		●		●	●	●	●
Hid-N-Lok®	Virgin Rubber	●	●	●					
Hid-N-Lok® II	Virgin Rubber	●		●	●	●	●	●	●
Aerobic Tile®	Virgin Rubber	●		●	●			●	
Pro-Lok®	Virgin Rubber					●	●		
Punishment Pad	Recycled Rubber	●	●	●		●	●	●	
Protect-O-Pad	Recycled Rubber	●	●	●		●	●	●	●

1 Interlok® Tiles

Our five choices of interlocking tile offer you the variety you need to create the environment and aesthetics you desire while also providing the right surface for the right area. Create traffic patterns or basic designs by choosing two or more colors in the same tile design. Your imagination is the only limitation. See page 7 for specific color options for each tile.

Our five interlocking tiles all feature slip resistance that exceeds ADA recommendations in wet and dry conditions and a Class 1 Flammability Rating (ASTM E-648/NFPA-253).

All of Pawling Pro-Tek® Athletic Flooring tiles require no adhesives. Our loose lay interlocking design provides for easy installation, saving you valuable labor costs. Compare our five styles of athletic tile to see which works best for your facility.



HL-155




Hid-N-Lok® II (HL-155) Our unique hidden interlocking system provides upscale styling with exceptional design flexibility. Great for both single or multi-color layouts, these versatile tiles are also available in a selection of popular school colors. A full list of all the color options can be found on page 7.

Height: 3/8"


Surface: Hammered

Static Coefficient of Friction: .093 Dry / Wet

Weight per tile: 12 lbs.

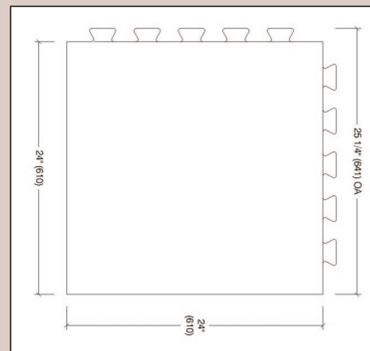

FL-150

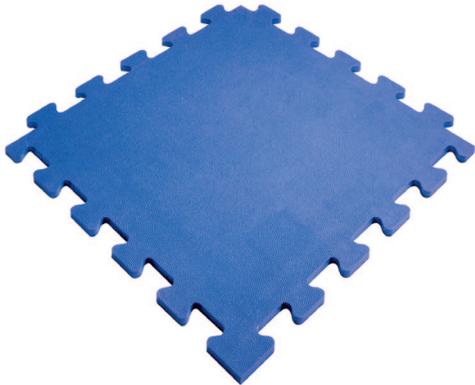


Flip-It® (FL-150) Double the life of your floor with our Flip-It® tiles. Reversible interlocking tiles provide exceptional value, plus the ease of quick tile replacements. Works best in single color layouts.

Height: 7/16"


Surface: Reversible Hammered

Static Coefficient of Friction: .080 Dry, .088 Wet

Weight per tile: 12 lbs.

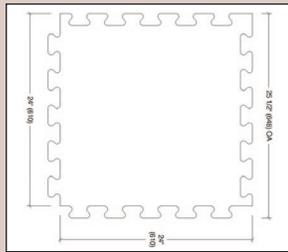

HL-100

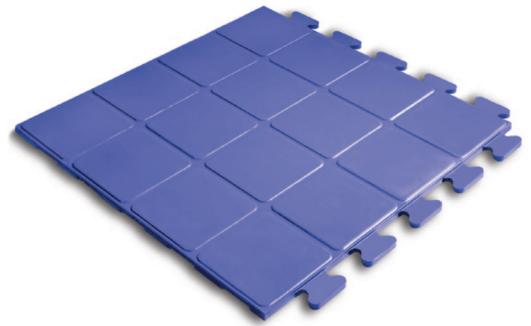


Hid-N-Lok® (HL-100) Our attractive 5-1/2" square embossed surface pattern provides designer styling with maximum impact protection. Hidden interlocks make multi-color designs both attractive and functional - use for traffic patterns or to create your own unique design. Height: 1/2"

Surface: Raised Squares

Static Coefficient of Friction: .095 Dry, .090 Wet

Weight per tile: 16 lbs.

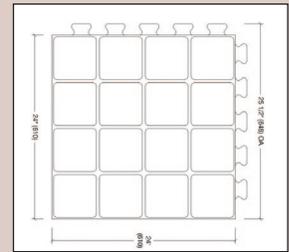

PL-200




Aerobic Tile™ (PL-200) Our Aerobic Tile™ provides the cushioned resilience and wall-to-wall impact support aerobic students and instructors require. The knobbed underside provides additional "give" and comfort.

Height: 9/16"


Surface: Raised Nubs

Static Coefficient of Friction: .094 Dry, 1.04 Wet

Weight per tile: 14 lbs.

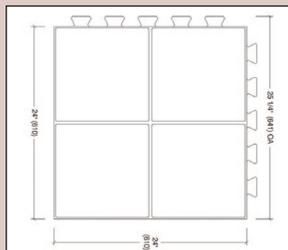

PL-100

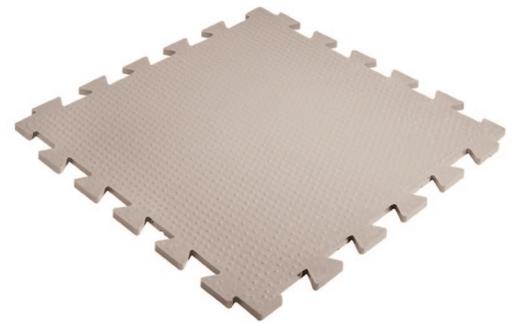


Pro-Lok® (PL-100) Excellent for use on concrete slabs, our Pro-Lok® tile can be found in ice arenas, ski lodges and industrial plants. The unique knob-and-groove underside and loose lay interlocking tabs facilitate air flow in high moisture areas, thereby reducing the potential of mildew build-up. Height: 7/16"

Surface: Raised Discs

Static Coefficient of Friction: .093 Dry / Wet

Weight per tile: 12 lbs.

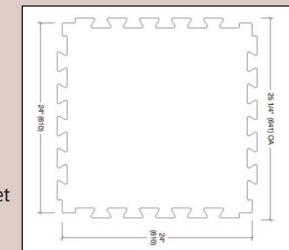

2 Recycled Rubber Tiles and Pads

For heavy-duty use in free weight areas, choose from Pawling's Protect-O-Pad and Punishment Pad Series. Our premium grade recycled rubber products are manufactured using a homogeneous pre-consumer compound that is revulcanized, allowing the flooring to maintain its dimensional integrity in heavy-duty fitness areas. These recycled products are non-absorbent and non-marking, require no adhesive to install and pass both MIL-W 5044C and UL 94HB tests for flammability.

P-40, 50, 60



These premium grade recycled rubber pads provide extra protection wherever it's needed - on hard floors, over carpeting, or over our Flip-It® and Hid-N-Lok® tiles in heavy-duty free weight areas. Our basic black 4' x 6' non-interlocking rubber pads are available in three thicknesses for a variety of fitness applications. These tiles are easy to trim on site to the exact dimensions you need.




Product Code	Size	Height	Weight	Recommended Uses
P-40	4'x6'	3/8"	50 lbs.	Under stationary equipment or as a protective walkway
P-50	4'x6'	1/2"	70 lbs.	Standard free weight applications
P-60	4'x6'	3/4"	105 lbs.	Heavy-duty free weight applications

P-80, 81, 82



The Protect-O-Pad (P-80) is our heavy-duty premium grade recycled rubber interlocking tile. Providing value, safety and durability, it's recommended for use in free weight areas as well as exercise areas, club houses, locker rooms, pro shops, ice arenas and even dugouts. Snug, precision cut interlocks provide gap-free protection for your entire floor. Beveled edges (P-81) and corners (P-82) available for non-wall-to-wall applications.

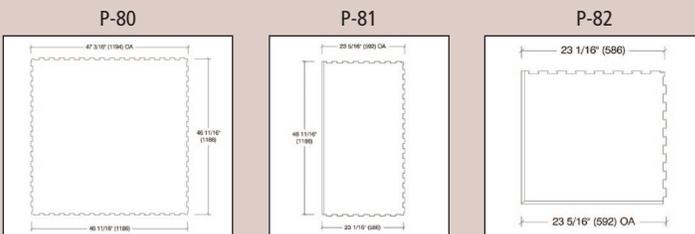


Product Code	Size	Height	Weight
P-80	4'x4'	1/2"	45 lbs. black 46 lbs. color
P-81	4'x2'	1/2"	22 lbs. black 23 lbs. color
P-82	2'x2'	1/2"	11 lbs. black 12 lbs. color

Standard Interlock® Colors


For all Interlock® Tiles




1
Black



3
Tan



7
Terra Cotta



8
Blue



38
Charcoal



176
Taupe*



344
Teal Green*

* Unavailable in PL-100 Styles

School Colors


Available for HL-155 Only




308
Emerald Green



224
Purple



15
Gold



14
Crimson



19
Navy Blue




117
Orange

Protect-O-Pad


For P-80, 81 and 82



1
Black




664
Black with
Gray Specks



665
Black with
Blue Specks



666
Black with
Red Specks



667
Black with
Green Specks

*Due to a limitation of printing, colors are representational only and may vary. Please request a sample when choosing final colors.



ALLPLASTICS ENGINEERING PTY LTD

Unit 20, 380 Eastern Valley Way
CHATSWOOD NSW 2067

P: (02) 9417 6111 F: (02) 9417 6169
Email: sales@allplastics.com.au

Web: www.allplastics.com.au



©2013 The Pawling Corporation

Pawling Corporation reserves the right to discontinue or modify a design without prior notice.