



Entrance Matting

Engineered and Manufactured by the Pawling Corporation



ALLPLASTICS
ARCHITECTURAL & BUILDING



Why Choose Pawling?

With over sixty-five years of experience, Pawling Corporation is a leading manufacturer of high-quality architectural products that will meet your material specifications as well as your design needs. We offer responsive, results-oriented design capabilities to satisfy any custom design requirement.

- Complete line of impact protection, entrance mats, athletic tile and parking products to protect your entire facility in any application
- Broad line of exceptional products to protect facilities front to back, inside and outside
- Custom-designed fabrications and colors based on your needs



Table of Contents

Rol-Dek® 4	Heavy-Duty Carpets 8
Drain Well® 5 & 6	Vinyl Backed Mats 9
Heavy-Duty Rubber Entrance Mats 6	Vinyl Entrance Mats 9
Metal Gratings 7	Insert and Color Selection Guide 10 & 11

The Pawling Difference

Pawling’s line of Pro-Tek® Entrance Mats and Gratings offers a wide variety of options for a multitude of applications. A properly designed system plays a vital role in providing a safe, clean and attractive entryway and interior environment. With a variety of colors, frame materials, and layout options to choose from, Pro-Tek® Entrance Mats and Gratings can meet the needs of all commercial, industrial and institutional facilities.

Frame Selection Guide

Our Rol-Dek®, Drain-Well® and Metal Grating products are all available with optional frames. The following guide is here to help you determine which frame is right for your needs:

	Frame Product Code	Applications	Aluminum Finishes
Rol-Dek®*	MRF-1002	Recessed Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
	MRF-1005	Recessed Level Bed	Solid Architectural Bronze
	SSF-125	Recessed Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
	BSF-225	Surface Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
Drain-Well®	RGF-250	Recessed Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
	SSF-250	Recessed Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
	RGF-300	Recessed Level Bed	Mill, Clear Anodized, Bronze Anodized, Black Anodized
	RGF-500/600	Recessed Deep Pit	Mill, Clear Anodized, Bronze Anodized, Black Anodized
Metal Gratings	RGF-200	Recessed Level Bed	Mill Finish Aluminum
	RGFB-200	Recessed Level Bed	Solid Architectural Bronze with polished finish
	RGFS-710/720	Recessed Level Bed	Mill Finish Stainless Steel
	RGFA-700/710/720	Recessed Level Bed	Mill Finish Aluminum


* Frame Styles shown may be used with any of our 3/8" -5/8" mats, including Rol-Dek®, Dura-Tile, Hi-Rib® tiles, Link Mats, Vinyl Backed Mats, and Carpet.

1 Rol-Dek® Series

Protecting your building from moisture and debris starts with Pawling's complete line of custom Pro-Tek® entrance mats - like our Rol-Dek® Series. You can achieve a sleek, architectural look with a quality product that rolls up quickly for easy maintenance and cleaning. In three popular styles, the Rol-Dek® Series provides protection in moderate to heavy traffic areas and may be used in both recessed and surface applications.

All Rol-Dek® entrance mats feature:

- Easy cleaning, rolls back 180°
- Six different tread insert options create multiple combinations of colors and functions
- Custom fabrication, including angles, arcs/radii, and cutouts
- Continuous resilient vinyl cushion reduces clatter
- Optional square nosing for on-site trimming
- Optional beveled nosing for surface applications
- Rolling load test to 350 lbs./wheel
- EM-650/EM-800 fabricated from at least 70% recycled aluminum

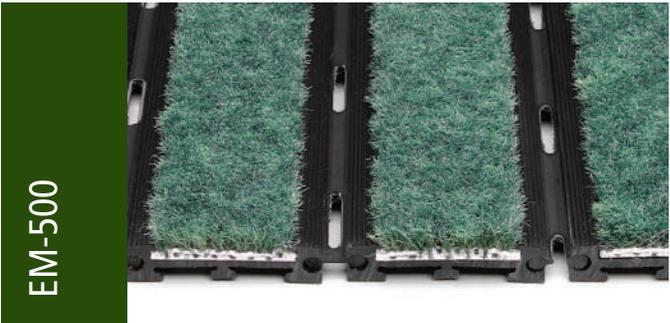

EM-500

Dimensions: 7/16"

Rail Material: Vinyl

Rail Color/ Finishes: Black



Construction: Perforated vinyl hinge

Roll Back Capability: Yes

Rolling Load/Wheel: 350 lbs.

Traffic: Moderate Interior

Shipping weight will not exceed 1.9 lbs./sq. ft.

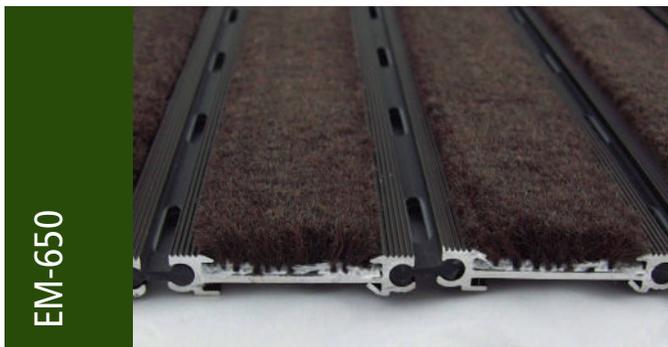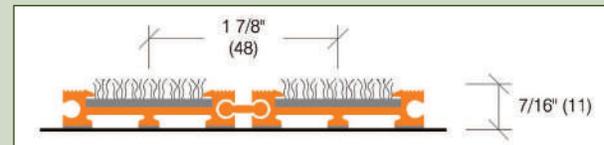

EM-650

Dimensions: 7/16"

Rail Material: Aluminum

Rail Color/ Finishes: Mill Finish, Clear Anodized, Bronze Anodized and Black Anodized

Construction: Perforated vinyl hinge





Roll Back Capability: Yes

Rolling Load/Wheel: 350 lbs.

Traffic: Heavy Interior or Covered Exterior

Shipping weight will not exceed 2.8 lbs./sq. ft.

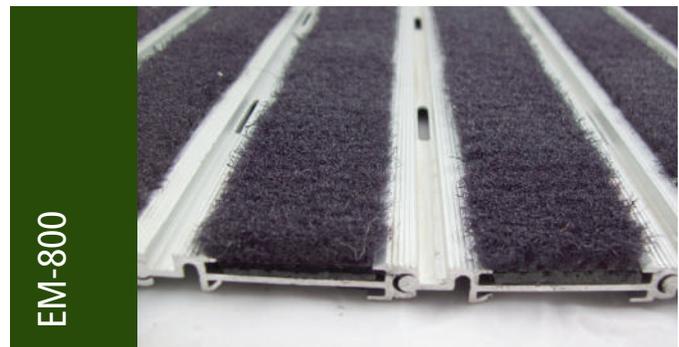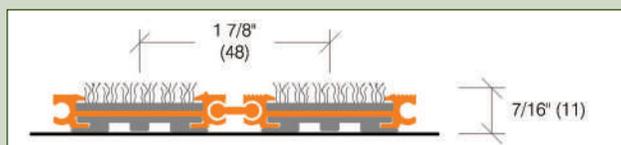

EM-800

Dimensions: 7/16"

Rail Material: Aluminum

Rail Color/ Finishes: Mill Finish, Clear Anodized, Bronze Anodized and Black Anodized

Construction: Solid or Perforated aluminum hinge




Roll Back Capability: Yes

Rolling Load/Wheel: 350 lbs.

Traffic: Heavy Interior or Exterior

Shipping weight will not exceed 3.0 lbs./sq. ft.

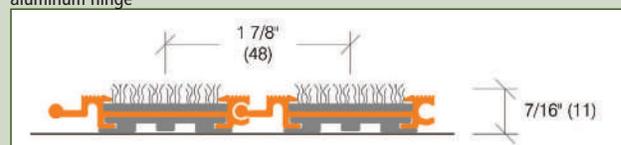

2 Drain-Well® Series

Make a statement at your entrance with our heavy-duty Drain-Well® entrance mats. With three options to choose from, you're sure to find the one that meets your needs. Trapping grime is easier with our Drain-Well® Series - moisture and dirt scrapes off shoes and gets trapped beneath the surface. Available in four aluminum finishes, our Drain-Well® gratings will give you the aesthetic look you want with the entrance protection your building needs.


All Drain-Well® entrance mats feature:

- Six different tread insert options for multiple combinations of colors and functions
- Custom fabrications for specific needs such as arcs and patterns
- Continuous resilient vinyl cushion reduces clatter
- Standard level bed frame systems (RG-500/600 feature optional deep pit frame systems)
- Fabricated from at least 70% recycled aluminum





RG-250

Dimensions: 3/4"  Roll Back Capability: Yes
 Rail Material: Aluminum Deep Pit Availability: No
 Rail Color/ Finishes: Mill Finish, Clear Anodized, Broze Anodized and Black Anodized Rolling Load/Wheel: 1,000 lbs.
 Construction: Perforated vinyl hinge Traffic: Heavy Interior or Exterior
 Shipping weight will not exceed 4.6 lbs./sq. ft.

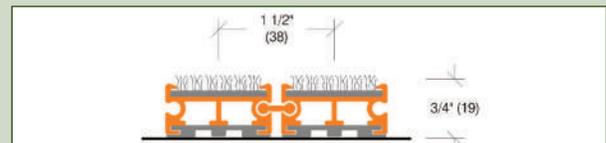


RG-300

Dimensions: 1-1/2"  Roll Back Capability: No
 Rail Material: Aluminum Deep Pit Availability: Yes (RG-500)
 Rail Color/ Finishes: Mill Finish, Clear Anodized, Broze Anodized and Black Anodized Rolling Load/Wheel: 350 lbs.
 Construction: Box beam rails fastened to support rails, spaced 12" on center with vibration proof fasteners Traffic: Heavy Interior or Covered Exterior
 Shipping weight will not exceed 3.5 lbs./sq. ft.

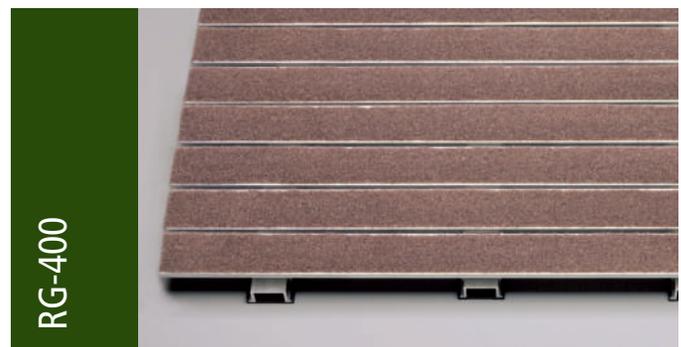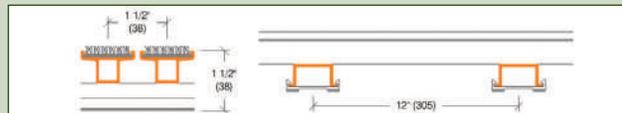

RG-400

Dimensions: 1-1/2"  Roll Back Capability: No
 Rail Material: Aluminum Deep Pit Availability: Yes (RG-600)
 Rail Color/ Finishes: Mill Finish, Clear Anodized, Broze Anodized and Black Anodized Rolling Load/Wheel: 450 lbs.
 Construction: Box beam rails fastened to support rails, spaced 12" on center with vibration proof fasteners Traffic: Heavy Interior or Covered Exterior
 Shipping weight will not exceed 3.7 lbs./sq. ft.

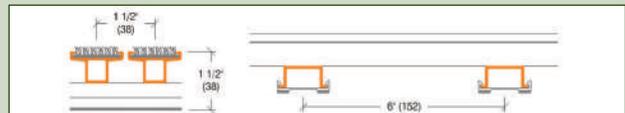

2 Drain-Well® Series

Keep your facility clean and safe with our recycled rubber entrance mat. Our EM-70 Tire Mat series of entrance mats feature recycled rubber from airplane tires. These rubber strips have woven nylon fibers for maximum absorption. Identical on top or bottom, the EM-70 can be flipped over for double the product life.



Height: 1 1/16"

Construction: Open or closed (see illustrations)

Tread Material: 100% post consumer recycled rubber

Rail Material: Mill Finish Aluminum


Color: Natural gray

EM-70

Product Code	Construction	Illustration
EM-70-CS	Closed construction with a single rubber strip	
EM-70-CD	Closed construction with a double rubber strip	
EM-70-OS	Open construction with a single rubber strip	
EM-70-OD	Open construction with a double rubber strip	

3 Heavy-Duty Rubber Entrance Mats

Pawling's Heavy-Duty Rubber Entrance Mats are designed to trap debris and minimize soil tracked into your building. Our heavy-duty rubber entrance mats feature excellent coverage for both interior and exterior high-traffic areas with slip resistance that exceeds ADA recommendations.

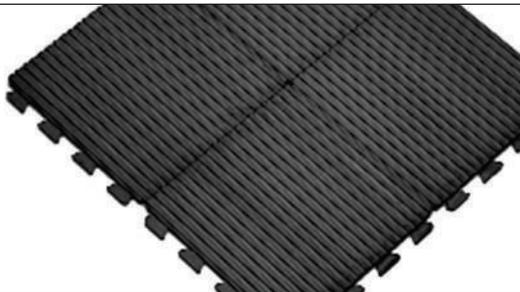

EM-205

Dimensions: 12" x 12" x 1/2"

Construction: Interlocking modular tiles

Material: Premium Rubber Compound


Color: Black

Installation: Loose Lay Interlocking

Static Coefficient of Friction Ratio (ASTM D-2047): Dry 0.97, Wet 1.02

Flammability: Passes FF-1-70 and FF-2-70

Weight: 2.4 lbs. / Ea.

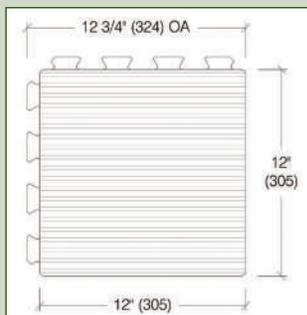

LT-50, 51

Dimensions: 12" x 12" tiles (LT-50) 12" x 25' rolls (LT-51)

Construction: Rugged tire cord bonded to fiberglass backing

Material: 100% Recycled Rubber


Color: Muted Gray Earthtone

Installation: Glue down

Static Coefficient of Friction Ratio (ASTM D-2047): Dry 0.67, Wet 1.07

Flammability: Passes FF-1-70

Weight: 2.25 lbs. / tile (50), 2.25lbs. / sq. ft. (51)

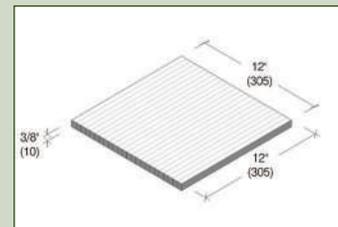


4 Metal Gratings

Our Pro-Tek® metal entrance gratings combine the beauty of metal with the exceptional strength of grid systems that are designed to stand up to the toughest traffic. Use in conjunction with our Maxi-Tuft Long Wear Carpet Matting to brush and remove moisture while providing a dramatic look for your entryway. With their smooth rollover capability, metal gratings such as our RG-200 are also excellent for applications involving wheelchairs or gurneys. Our metal gratings are well suited for both interior and exterior applications and are designed with a sculpted shape to increase slip resistance and provide a walking surface that will remove debris as it is carried into the building by foot traffic. The completed assembly provides openings between tread rails to allow dirt and debris to be captured and keep the interior of your building safe and clean.



All styles feature:

- Clean architectural lines for an elegant, high-tech appearance
- Safe, heel-proof design
- All-weather durability and easy cleaning
- Gratings can be temporarily removed for thorough cleaning
- Excellent choice for applications involving wheeled equipment

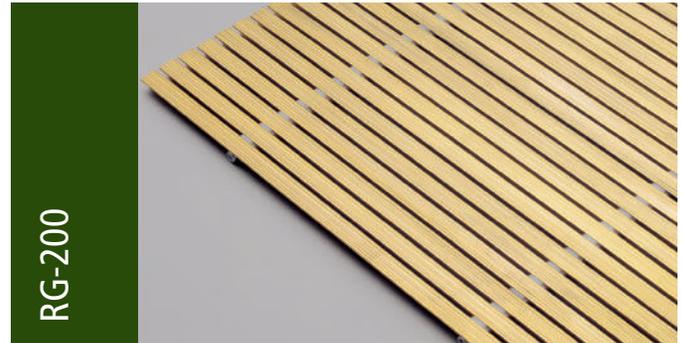




RG-200

Dimensions: 13/16"
 Rail Material: Aluminum, Bronze
 Rail material finishes: Mill Finish Aluminum (RGA-200), Satin Finish Bronze (RGB-200)
 Rolling Load/Wheel: 350 lbs.
 Traffic: Heavy Interior or Exterior
 Construction: T-gratings fastened by steel tie rods and nylon insert lock nuts
 Maximum Weight/sq. ft.:
 Bronze: 7.25 lbs.
 Aluminum: 2.6 lbs.

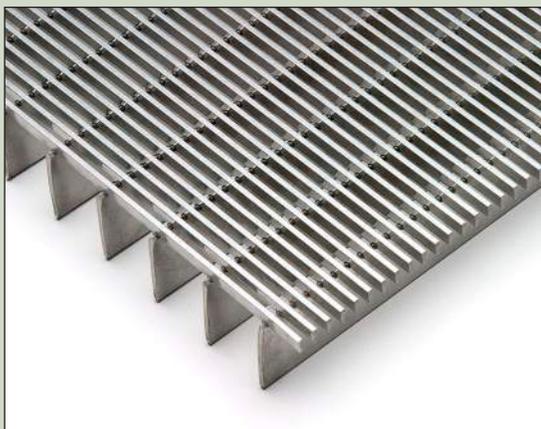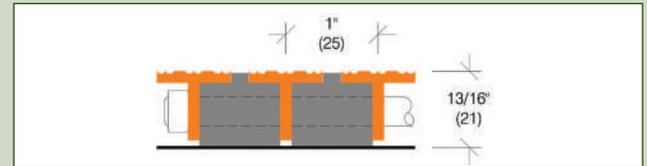

RG-700, 710, 720

Rail Finish/Material: Satin Stainless Steel
 Construction: Welded assembly
 Rolling Load/Wheel: 500 lbs.
 Traffic: Heavy Interior or Exterior
 Maximum Weight/sq. ft.: 3.0 lbs. (700), 4.0 lbs. (710), 6.0 lbs. (720)

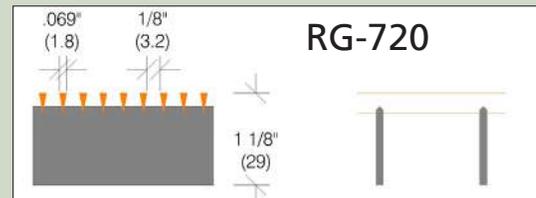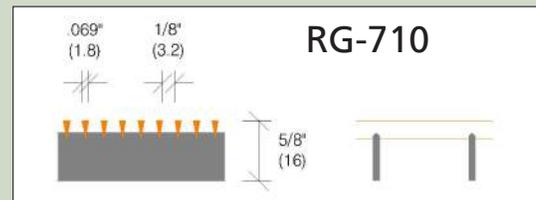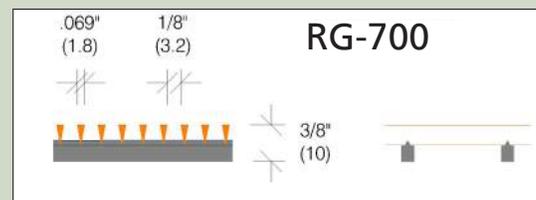

5 Heavy-Duty Carpets

Bring an upscale appearance to high-abuse or high-traffic areas with Pawling's Pro-Tek® Heavy-Duty Carpets. With a durable, rugged blend of heather fiber that provides excellent resistance to fading and UV light degradation, our heavy-duty carpets are perfect for interior and exterior applications. High traffic locations such as fitness clubs, country clubs, hotels and other lobby entrances will benefit from the non-woven needle-punched construction that makes Pawling's carpet more durable than conventional commercial carpet. Our Berber and Protector carpet lines offer attached vinyl beveled nosing for surface applications.

All of Pawling's Berber, Protector and Jaguar carpets feature:

- A wide variety of colors to complement any décor
- Custom sizing
- Coarse fibers that effectively trap soil and debris
- Easy to clean durability
- Fiberbond construction that allows for factory or on-site custom cutting without unraveling
- Non-woven needle-punch construction
- DOC FF-1-70 & FF-2-70 flammability ratings
- Nonskid composite rubber backing



EM-20, 22

Dimensions: (EM-20) 6'6" or 13'2" W x 1/2" H x approx. 50' roll
 (EM-22) 19-11/16" x 19/11/16" W x 1/2" H; 10 tiles per case

Pattern: Nubby Hobnail

Traffic: Moderate to Heavy Interior/Exterior

Pile weight: 52 oz./sq. yard

Installation: EM-20 Loose lay or glue down, EM-22 Glue Down

Fiber Type: Polypropylene blend of 17-240 denier per filament fibers; soultion dyed; UV stable

Static Coefficient of Friction Ratio (ASTM C-1028-96): Dry 0.58, Wet 0.61

Colors: See page 11

Weight: .75 lbs./sq. ft.



EM-40

Dimensions: 6'6" or 13'2" W x 1/2" H x 50' roll

Traffic: Moderate to Heavy Interior/Exterior

Pile weight: 52 oz. Sq. Yard

Installation: Loose lay or glue down

Fiber Type: Polypropylene blend of 17-240 denier per filament fibers; soultion dyed; UV stable

Static Coefficient of Friction Ratio (ASTM C-1028-96): Dry 0.58, Wet 0.62

Colors: 4 colors / See page 11

Pattern: Ribbed

Weight: .75 lbs./sq. ft.



EM-50

Dimensions: 6'6" or 13'2" W x 3/8" H x 68'11" roll

Traffic: Moderate Interior/Exterior

Pile weight: 38 oz. Sq. Yard

Installation: Loose lay or glue down


Fiber Type: Polypropylene blend of 17-240 denier per filament fibers; soultion dyed; UV stable

Static Coefficient of Friction Ratio (ASTM D2047-82): Dry 0.53, Wet 0.62

Colors: 2 colors / See page 11

Pattern: Double Rib

Weight: .54 lbs./sq. ft.




6 Vinyl Backed Mats

Pawling's Pro-Tek® line of Maxi-Tuft Long Wear Carpet and Natural Cocoa Mats provides densely-tufted fiber construction for exceptional brushing and drying performance. The unique tetra-lobal shaped fibers of Maxi-Tuft collect three times the dirt of ordinary standard nylon type carpets. Used in combination with our Rol-Dek®, Drain-Well® and Metal Grating Series entrance mats, Maxi-Tuft will provide the best combination of style and performance to keep your entryways beautiful for years to come.

EM-701




<p>Height: 3/8"</p> <p>Dimensions (approximate): 6'7" x 82'</p> <p>Fiber Type: 100% Polyamide Nylon: 80 and 40 Detex, Blend tetra-lobal filters</p> <p>Colors: Black or Charcoal</p> <p>Construction: Tufted/cut pile</p>	<p>Traffic: High Interior</p> <p>Static Coefficient of Friction Ratio (ASTM D-2047): Dry 0.87, Wet 0.87</p> <p>Flammability: DOC FF-1-70; Class 1</p> <p>Weight: .65 lbs./sq. ft.</p>
---	---



EM-300, 301, 302



<p>Height: 5/8" (300), 3/4" (301), 1" (302)</p> <p>Dimensions (approximate): EM-300 Natural: 78" x 39' 4" roll Brown/Charcoal: 78" x 41" roll EM-301/302 Natural only: 78" x 39' 4" roll</p> <p>Fiber Type: Natural Cocoa Fiber Yarn (coir)</p> <p>Colors: Natural (EM-300 also in Charcoal or Brown)</p>	<p>Construction: Indian Cocoa fiber bonded to solid vinyl backing</p> <p>Traffic: Moderate to high interior</p> <p>Static Coefficient of Friction Ratio (ASTM D-2047): Dry 0.75, Wet 1.09</p> <p>Flammability: DOC FF-1-70 and FF-2-70</p> <p>Weight: EM-300 1.75 lbs./sq. ft. EM-301 2.00 lbs./sq. ft. EM-302 2.50 lbs./sq. ft.</p>
---	--




7 Vinyl Entrance Mats

Pawling's Pro-Tek® vinyl entrance mats combine performance and style to suit any entry requirements. The LM-100 and LM-400 both feature safe, heel-proof drainage holes for a comfortable and slip-resistant entry surface. Exceeds the ADA recommended standards for slip resistance in wet and dry areas (0.67 Dry and 0.89 Wet per ASTM D-2047).



<p>Dimensions : 7/16" thickness (custom length and width)</p> <p>Material: Flexible Vinyl</p> <p>Colors: 12 (Custom Logo Available)</p> <p>Construction: Flexible vinyl links connected by 12 gauge spring steel wires. Square and beveled nosings available.</p> <p>Optional: Open Weave (LM-400)</p> <p>Traffic: Moderate to Heavy Interior or Exterior</p> <p>Installation: Loose Lay</p> <p>Flammability: Class 1 (ASTM E-648)</p> <p>Weight: 2.3 lbs./sq. ft. (100), 1.8 lbs./sq. ft. (400)</p>	
--	---





Rol-Dek® and Drain-Well® Tread Insert Color Selection Guide

Rigid-Back Nylon Carpet (SNC)

- Heated interior absorption applications
- Effective moisture/dust control in light traffic areas




Bristle Filament (BF)

- Interior or exterior scraping/absorption applications
- Aggressive brush action for maximum cleaning
- Superior indoor/outdoor performance




Aluminum Abrasive (AA)

- Exterior or interior scraping application
- Not recommended for heavy, pivoting rolling loads
- Carborundum chip surface provides exceptional all weather traction for pedestrian traffic

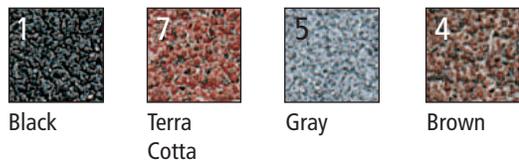

Maxi-Tuft Long Wear (MLW)

- Heated interior or exterior scraping/absorption applications
- Three times the durability of standard nylon carpet
- Excellent crush/abrasion resistance
- Available in full rolls for matching custom-sized mats (EM-701)



Rigid Corrugated Vinyl (RCV)

- Interior or exterior scraping applications
- Low maintenance/excellent scraping
- Moderate Rolling Loads



Corrugated Aluminum (CA)

- Exterior or interior scraping applications
- Most durable
- Requires least maintenance
- Only insert recommended to accommodate "pivoting" rolling loads
- Recommended for supermarket and wheeled cart applications



Due to a limitation of printing, colors are representational only and may vary. Please request a sample when choosing final colors.

Color Selection Guide

EM-20 & EM-22 Berber




**not available for EM-22


EM-40 Protector



EM-50 Jaguar




LM-100 & LM-400 Parco-Link

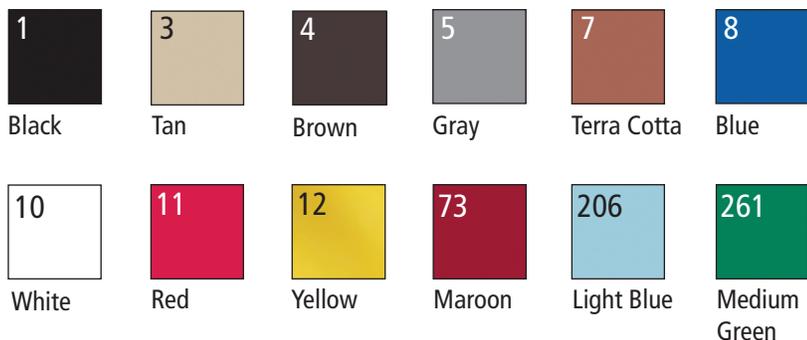

EM-300, 301, 302 Cocoa Mat



EM-701 Maxi-Tuft



Due to a limitation of printing, colors are representational only and may vary. Please request a sample when choosing final colors.



ALLPLASTICS ENGINEERING PTY LTD

Unit 20, 380 Eastern Valley Way
CHATSWOOD NSW 2067

P: (02) 9417 6111 F: (02) 9417 6169
Email: sales@allplastics.com.au

Web: www.allplastics.com.au



©2014 The Pawling Corporation
Pawling Corporation reserves the right to discontinue or modify a design without prior notice.